

SCAT TRAK[®]

SKID STEER LOADERS

1500D
1500DX

SKID STEER LOADERS

High Performance

- ▶ 1500 lb operating capacity
- ▶ Long wheelbase for stable and smooth ride
- ▶ Widest track in its class for greater side stability
- ▶ 7.0 MPH travel speed
- ▶ Clean burning, low emission 60hp turbocharged diesel engine
- ▶ 1500DX offers 31 GPM pump for high flow auxiliary hydraulics

Easy Access

- ▶ Forward tilting ROPS/FOPS cab allows quick and easy access to engine, hydrostatic and hydraulic components
- ▶ Swing out tailgate, hinged top engine cover, lift out floor panel and drive chain access plates for excellent access to all key components

Durable Design

- ▶ Welded unitized frame, modular axles, corrosion resistant pivot pins, rugged Quick-Attach system, sealed Teflon bushings and lubed-for-life universal joint

Operator Comfort

- ▶ Extra wide operator compartment
- ▶ Easy entrance and exit (no center cylinder to step over)
- ▶ Easy-to-read gauge/warning light panel
- ▶ Conventional hand and foot controls standard; wrist action controls optional



1500D/1500DX



High flow 31 GPM pump on DX model provides power for the most demanding applications.



Longer wheelbase makes the 1500D ideal for landscape, nursery, construction and industrial jobs.




A wide variety of optional attachments are available.

SCATTRAK[®]

SKID STEER LOADERS

1500
1500DX

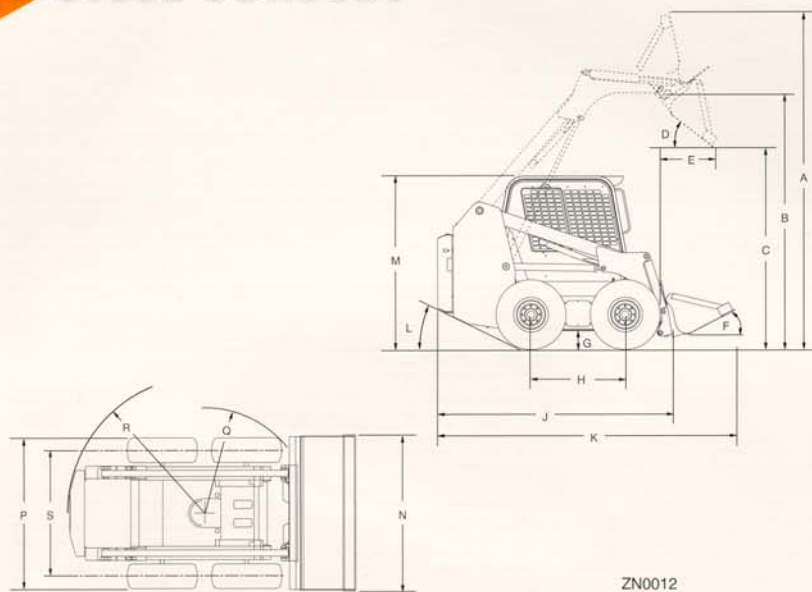

ZN0012

Dimensions

A. Overall operating height (with dirt bucket 66" [1676 mm])	148.3" (3767 mm)
B. Height to hinge pin	113.8" (2891 mm)
C. Dump height	89.8" (2281 mm)
D. Dump angle	36°
E. Dump reach	24.0" (610 mm)
F. Maximum roll back	29°
G. Ground clearance	8.0" (203 mm)
H. Wheelbase	40.0" (1016 mm)
J. Overall length (less bucket)	102.3" (2598 mm)
K. Overall length (with dirt bucket)	129.5" (3289 mm)
L. Angle of departure	28.6°
M. Overall height	78.0" (1981 mm)
N. Bucket width (inside dimension)	66.0" (1676 mm)
P. Clearance width (less bucket) — 10.00 x 16.5 tires	65.0" (1651 mm)
Q. Front clearance circle (with bucket)	77.0" (1956 mm)
R. Rear clearance circle	60.5" (1537 mm)
S. Tread width	54.5" (1384 mm)

Engine

Kubota V2003-TE
4 cylinder liquid cooled turbocharged diesel,
60 hp (44,7 kW) @ 2800 rpm
Displacement 122 cu. in (2,0 liters)
Fuel tank capacity 17.3 gal (65,5 liters)

Travel Speed

Travel range 0-7.0 MPH (0-11,1 km/h)

Operating Specs

Operating capacity 1500 lbs (680 kg)
Tipping load 3000 lbs (1360 kg)
Hydraulic pump flow rate 16.4 GPM (62 liters/min)
High flow hydraulics (DX only)
@ 2500 psi 31.0 GPM (117 liters/min)
Hydraulic reservoir capacity 10 gal (37,8 liters)
*Approx. operating weight (D) 5867 lbs (2661 kg)
*Approx. operating weight (DX) 5957 lbs (2702 kg)
*Full fuel tank, 165 lbs (75 kg) operator, 66-in (1676 mm) dirt bucket,
10.00 x 16.5 — 8-ply tires.

Standard Equipment

- ▶ Quick-Attach mounting frame
- ▶ Auxiliary hydraulics with flat face couplers
- ▶ Adjustable seat with 2" seat belt
- ▶ Operator restraint bar
- ▶ Dual travel/steering levers
- ▶ Tilt forward ROPS/FOPS cab
- ▶ Emergency exit rear window
- ▶ Mechanical park lock
- ▶ Loader arm service support
- ▶ Electronic loader arm lockout
- ▶ High flow auxiliary hydraulics (CX only)
- ▶ Dual element air cleaner
- ▶ Quick cycle glow plug start assist
- ▶ Back-up alarm
- ▶ 10.00 x 16.5 — 8-ply heavy-duty flotation tires
- ▶ Lockable doors and covers
- ▶ 12-Volt (525CCA) battery
- ▶ Halogen work lights — two front/one rear
- ▶ Fuel gauge
- ▶ Hourmeter
- ▶ Warning light system
 - ▶ Engine water temperature, engine oil pressure and hydraulic oil temperature with audible alarm
 - ▶ Electrical charging system, air filter restriction indicator, hydraulic filter bypass indicator and pre-heat indicator

Options

- ▶ 7.00 x 15 non-pneumatic solid tires
- ▶ 7.50 x 15 non-pneumatic segmented tires
- ▶ 10.00 x 16.5 non-pneumatic segmented tires
- ▶ 31.00 x 15.5 x 15 — 8-ply super flotation tires
- ▶ 4-point lift hooks
- ▶ Spark arresting muffler
- ▶ Engine block heater
- ▶ Hydraulic reservoir heater
- ▶ In-line engine coolant heater
- ▶ 12-Volt (800CCA) battery
- ▶ Catalytic exhaust purifier
- ▶ Engine air intake pre-cleaner
- ▶ Top window
- ▶ Cab enclosure with heater, defroster and wiper
- ▶ Special applications front door
- ▶ Soft cab enclosure
- ▶ Deluxe seat
- ▶ Amber strobe light
- ▶ Horn
- ▶ 3" seat belt
- ▶ Wrist action hand controls
- ▶ Engine automatic shutdown system

WE RESERVE THE RIGHT TO AMEND THESE SPECIFICATIONS AT ANY TIME WITHOUT NOTICE. THE ONLY WARRANTY APPLICABLE IS THE STANDARD WARRANTY PERTAINING TO A PARTICULAR PRODUCT AND SALE. WE MAKE NO OTHER WARRANTY EXPRESSED OR IMPLIED.

The OmniQuip Family Includes:
**SKYTRAK[®], SNORKEL[®], LULL[®],
and SCATTRAK[®]**



901 Sunset Road
Port Washington, Wisconsin 53074 USA
(262) 268-3250 Fax: (262) 284-1153
www.compact-technologies.com