


	<b>6036</b>	<b>6042</b>	<b>8042</b>	<b>10042</b>	<b>10054</b>
Rated Capacity @ 24 in. (610 mm) Load Center	6,000 lb (2,722 kg)	6,000 lb (2,722 kg)	8,000 lb (3,629 kg)	10,000 lb (4,536 kg)	10,000 lb (4,536 kg)
Maximum Lift Height	36 ft 1 in. (11.0 m)	41 ft 11 in. (12.78 m)	41 ft 11 in. (12.78 m)	42 ft 1 in. (12.83 m)	53 ft 2 in. (16.21 m)
Capacity @ Maximum Lift Height	6,000 lb (2,722 kg)	6,000 lb (2,722 kg)	6,000 lb (2,722 kg)	*6,000 lb (2,722 kg)	*4,000 lb (1,814 kg)
Maximum Reach	22 ft 4 in. (6.81 m)	27 ft 11 in. (8.51 m)	26 ft 7 in. (8.1 m)	26 ft 7 in. (8.1 m)	*38 ft 9 in. (11.81 m)
Capacity @ Maximum Reach	1,800 lb (816 kg)	1,400 lb (635 kg)	2,200 lb (998 kg)	6,000 lb (2,722 kg)	3,000 lb (1,361 kg)
Approximate Operating Weight (with Carriage and Forks)	21,300 lb (9,662 kg)	25,100 lb (11,385 kg)	27,100 lb (12,292 kg)	27,300 lb (12,383 kg)	28,200 lb (12,791 kg)
A. Length (Less Forks)	224 in. (5.7 m)	234 in. (5.9 m)	228 in. (5.8 m)	248 in. (6.3 m)	252 in. (6.4 m)
B. Width	99 in. (2.51 m)	99 in. (2.51 m)	99.2 in. (2.5 m)	102 in. (2.59 m)	102 in. (2.59 m)
C. Height	100 in. (2.54 m)	102 in. (2.59 m)	99.4 in. (2.52 m)	100.1 in. (2.54 m)	101.1 in. (2.57 m)
D. Wheelbase	113 in. (2.87 m)	113 in. (2.87 m)	119.5 in. (3.04 m)	119.5 in. (3.04 m)	119.5 in. (3.04 m)
E. Ground Clearance	15 in. (381 mm)	15 in. (381 mm)	18 in. (460 mm)	18 in. (460 mm)	18 in. (460 mm)
Outside Turning Radius	13 ft 9 in. (4.19 m)	14 ft (4.27 m)	13 ft (3.96 m)	14 ft 2 in. (4.32 m)	13 ft 9 in. (4.19 m)
Drive	4 x 4	4 x 4	4 x 4	4 x 4	4 x 4
Engine	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L	Cummins QSF3.8L
HP @ RPM	74 hp @ 2,500 rpm	74 hp @ 2,500 rpm	110 hp @ 2,600 rpm	110 hp @ 2,600 rpm	110 hp @ 2,600 rpm
Transmission	Powershift	Powershift	Powershift	Powershift	Powershift
Axle — Front	High-Bias, Limited Slip	High-Bias, Limited Slip	High-Bias, Limited Slip	High-Bias, Limited Slip	High-Bias, Limited Slip
Axle — Rear	Planetary	Planetary	Planetary	Planetary	Planetary
Steering	All-Wheel	All-Wheel	All-Wheel	All-Wheel	All-Wheel
Tires	370/75-28	370/75-28	370/75-28	400/75-28	400/75-28
Maximum Travel Speed	19 mph (31 kmph)	19 mph (31 kmph)	19 mph (31 kmph)	20 mph (32 kmph)	20 mph (32 kmph)
Frame Tilt Left/Right Frame Leveling	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees	±10 Degrees

\*With outriggers down.

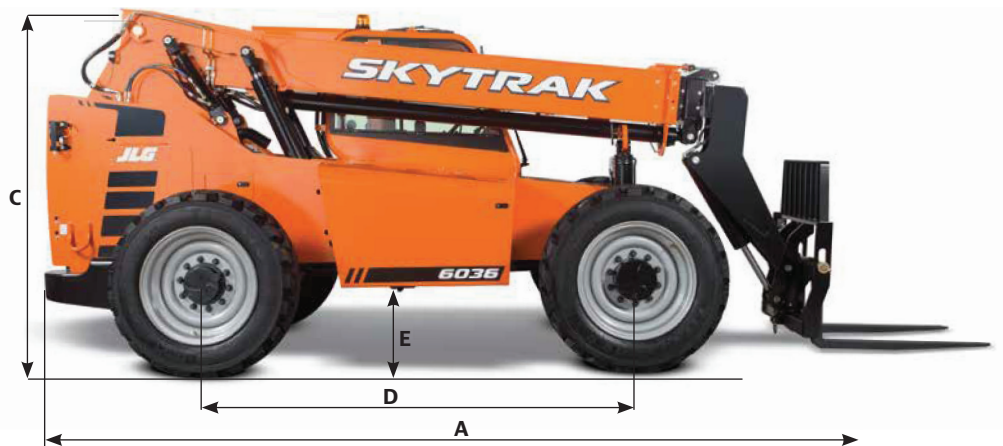

For complete specifications, visit [www.jlg.com](http://www.jlg.com)

Due to continuous product improvements, JLG Industries reserves the right to make specification and/or equipment changes without prior notification. These machines meet or exceed ASME B56.6-2005 as originally manufactured for intended applications.