


Concrete Bucket

The concrete bucket can increase your job site efficiency by reducing the amount of time and personnel that are required to get concrete materials to elevated sites.

Features

- Approx. 36 in. x 36 in. top opening
- Manual and auxiliary hydraulic options available
- Discharge hose options

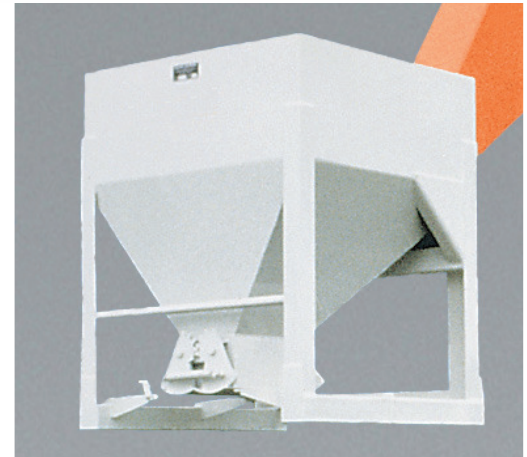

Non-Current Production - Concrete Buckets Available Through JLG Aftermarket Parts

CAPACITY			.5 cu. yd.	1 cu. yd.	.5 cu. yd.	1 cu. yd.
CONTROLS			Manual	Manual	Hydraulic	Hydraulic
TYPE			Quick Switch Mount	Quick Switch Mount	Quick Switch Mount	Quick Switch Mount
PART NO.			8866444	8866443	8866442	8866441
MODEL	SN BREAKS	LOAD CHART BOOKLET				
SKYTRAK	6036	Prior To 0160031200	Consult Factory	•	•	
	6042	Prior To 0160031200	Consult Factory	•	•	
	8042	Prior To 0160031235	Consult Factory	•	•	
	10042	Prior To 0160031425	Consult Factory	•	•	•
	10054	Prior To 0160031255	Consult Factory	•	•	•
LULL	644E-42	Prior To 0160031500	7300628	•	•	
	944E-42	Prior To 0160031500	7301586	•	•	

Non-Current Production - Concrete Bucket Discharge Hoses Available Through JLG Aftermarket Parts

HOSE LENGTH			4 in.	6 in.	8 in.	Rubber Side Discharge
PART NO.			8866446	8866464	8866560	8866445
MODEL	SN BREAKS	LOAD CHART BOOKLET				
SKYTRAK	6036	Prior To 0160031200	Consult Factory	•	•	•
	6042	Prior To 0160031200	Consult Factory	•	•	•
	8042	Prior To 0160031235	Consult Factory	•	•	•
	10042	Prior To 0160031425	Consult Factory	•	•	•
	10054	Prior To 0160031255	Consult Factory	•	•	•
LULL	644E-42	Prior To 0160031500	7300628	•	•	•
	944E-42	Prior To 0160031500	7301586	•	•	•

NOTES:

- Use only JLG approved attachments with proper material handler model/attachment load capacity charts displayed in the operator's cab.
 - Never use your attachment as a work platform or personnel carrier.
- Can't find the attachment you are looking for? Contact your JLG Aftermarket Parts representative at 1-877-JLG-LIFT or visit www.jlg.com.